

magicuae

User's manual

Introduction

MagicUAE 26 is an optimized configurations set for *WinUAE Amiga emulator* from Toni Willen (included in the package).

Every configurations have the closest display and behavior that the original models.

Configurations list

Classic Serie

- Amiga 500
- Amiga 500+
- Amiga 600
- Amiga 1000
- Amiga 1200
- Amiga 2000
- Amiga 3000 / 68881
- Amiga 3000 / 68882
- Amiga 3000T
- Amiga 3000T / 040
- Amiga 4000
- Amiga 4000 EC
- Amiga 4000T
- Amiga 4000T / 060
- Amiga CD32
- Commodore CDTV

Expanded Serie

- Amiga 500 – Extended 1Mb
- Amiga 1200 – 68030 – 10Mb
- Amiga 1200 – 68040 – 34Mb
- Amiga 4000T – Cyberstorm MK3 – GFX – 194Mb
- AmigaOS 4.1– Cyberstorm PPC 128Mb – GFX 512Mb – 194Mb
- Amiga CD32 – SX32 Pro – 10Mb

Minimum Required

- Windows 7,10,11
- FullHD screen (1920x1080)
- Screen set with a 1080 vertical resolution
- Refresh rate 50hz compatible
- Roms Kickstart (not included for copyrights)
- Double core processor for PPC Emulation

List of required Roms Kickstart

- A1000 : 1.1 (Kickstart 31.34) or 1.2 (Kickstart 33.180)
- A500 / A2000 : 1.3 (Kickstart 34.50)
- CDTV : 1.3 (Kickstart 34.50) + extended Rom + Flash Ram
- A3000 / A3000T : 2.0 (Kickstart 36.207)
- A500+ : 2.04 (Kickstart 37.175)
- A600 : 2.05 (Kickstart 37.299 or 37.300)
- A1200 : 3.0 (Kickstart 39.106) or 3.1 (Kickstart 40.68)
- A4000 : 3.0 (Kickstart 39.106)
- CD32 : 3.1 (Kickstart 40.60) + extended Rom + Flash Ram
- A4000T : 3.1 (Kickstart 40.70)



All Amiga can boot with a superior Rom Kickstart.

Before to start

- Set your screen refresh rate to 50 or 100hz
- If your screen doesn't offering a 50 or 100hz refresh rate, you can create a custom resolution/refresh rate in your graphic driver settings

Be sure than your screen support a 50 or 100hz refresh rate before to create a custom configuration in your graphic driver.

Intense Creative is not responsible for any damage to your screen or any other device.

WinUAE 5.3 or WinUAE 6.0

MagicUAE 26 include configurations for WinUAE 5.3 and WinUAE 6.0.

WinUAE 6.0 configurations: For emulation based on the latest technological advances

WinUAE 5.3 configurations: For more authentic emulation (not compatible with WinUAE 6.0).

Setup

1. Install WinUAE 5.3 or 6.0 located in the WinUAE directory
2. Copy and paste the « **MagicUAE 26** » directory located in *MagicUAE26/WinUAE 5.3 or WinUAE 6.0* in the *.../Winuae/Configurations/Hardware* directory in your hard disk
3. Copy and paste the content of the « **Sys** » directory (capsimg and Qemu) in the WinUAE directory
4. Copy and paste the content of « **Accelerator Roms** » where is located your Rom Kickstarts
5. Open WinUAE, select one of the **MagicUAE 26** configuration and click on « **load** » on the bottom
6. Click on « **Rom** » in the left column and select the right Rom in « **Main Rom file** » depending of the model (see the [page 3](#) for the list). *Picture 1 – Page 8*
7. For the CDTV and CD32, don't forget to add the « **Extended Rom file** » and the « **Flash Ram** »
8. Repeat the same operation for each model and save them.

Expanded Configurations

1. Load one of the Expanded Configurations and click on « Expansions » on the left
2. Select the right manufacturer and the range board in the « Accelerator board settings »
3. Select the right board Rom in the « Accelerator board ROM file » (the ROM Files are included in the « Accelerator boards » directory)
4. Don't forget to save each Expanded Configuration

Accelerator boards guide


A1200-030 – No need to select an Accelerator board ROM

A1200-040 - No need to select an Accelerator board ROM

A4000T-Cyberstorm MK3 - Phase 5 Cyberstorm / Cyberstorm MKIII / Cyberstorm MKIII

AMIGAOS 4.1 - Phase 5 Cyberstorm / Cyberstorm PPC / Cyberstorm PPC


CD32 SX32 Pro - DCE / SX32 Pro / SX32Pro




AmigaOS 4.1 needs a very powerfull computer.

Additional Features

- Start immediately the emulation by double clicking on the configuration icon file
- Quit emulation by pressing [CTRL] + [F11]
- Open WinUAE during emulation by pressing [F12] (in particular for to swap disk)

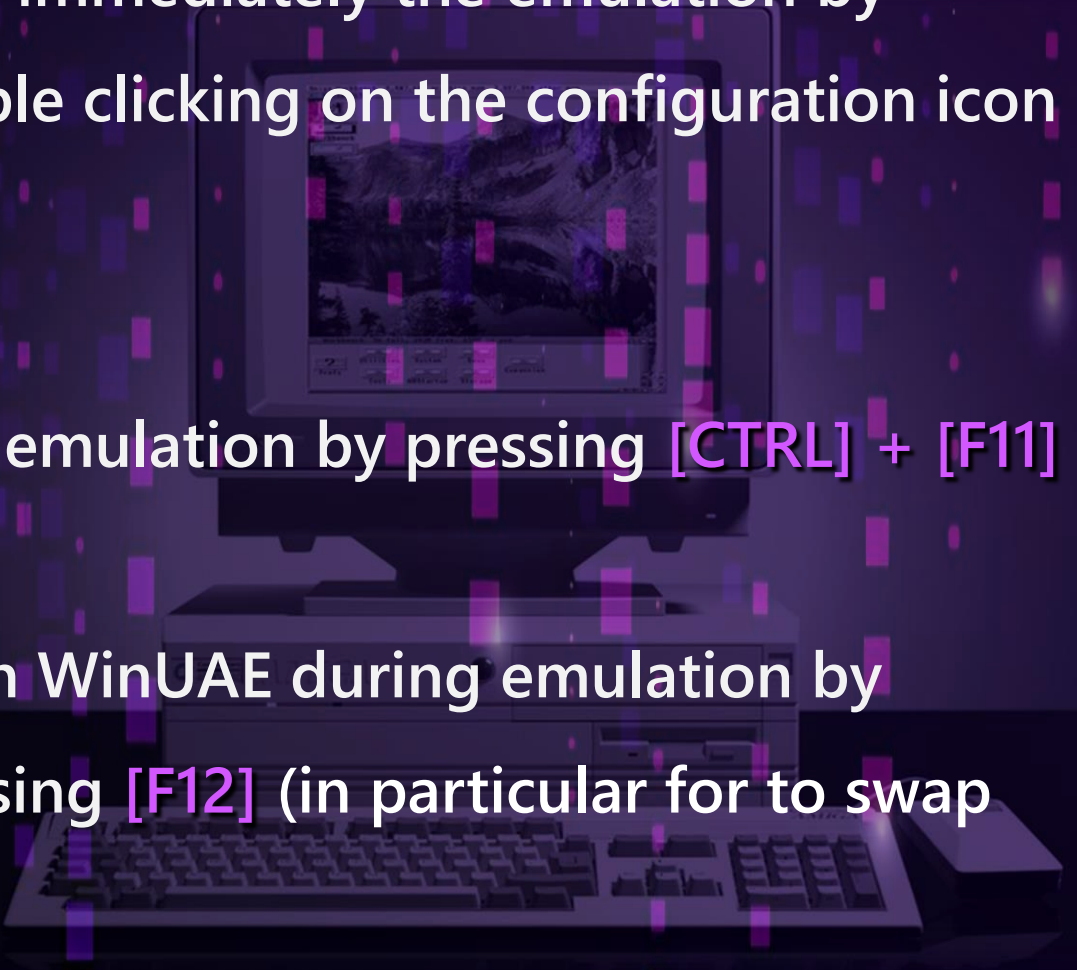

Additional Guide

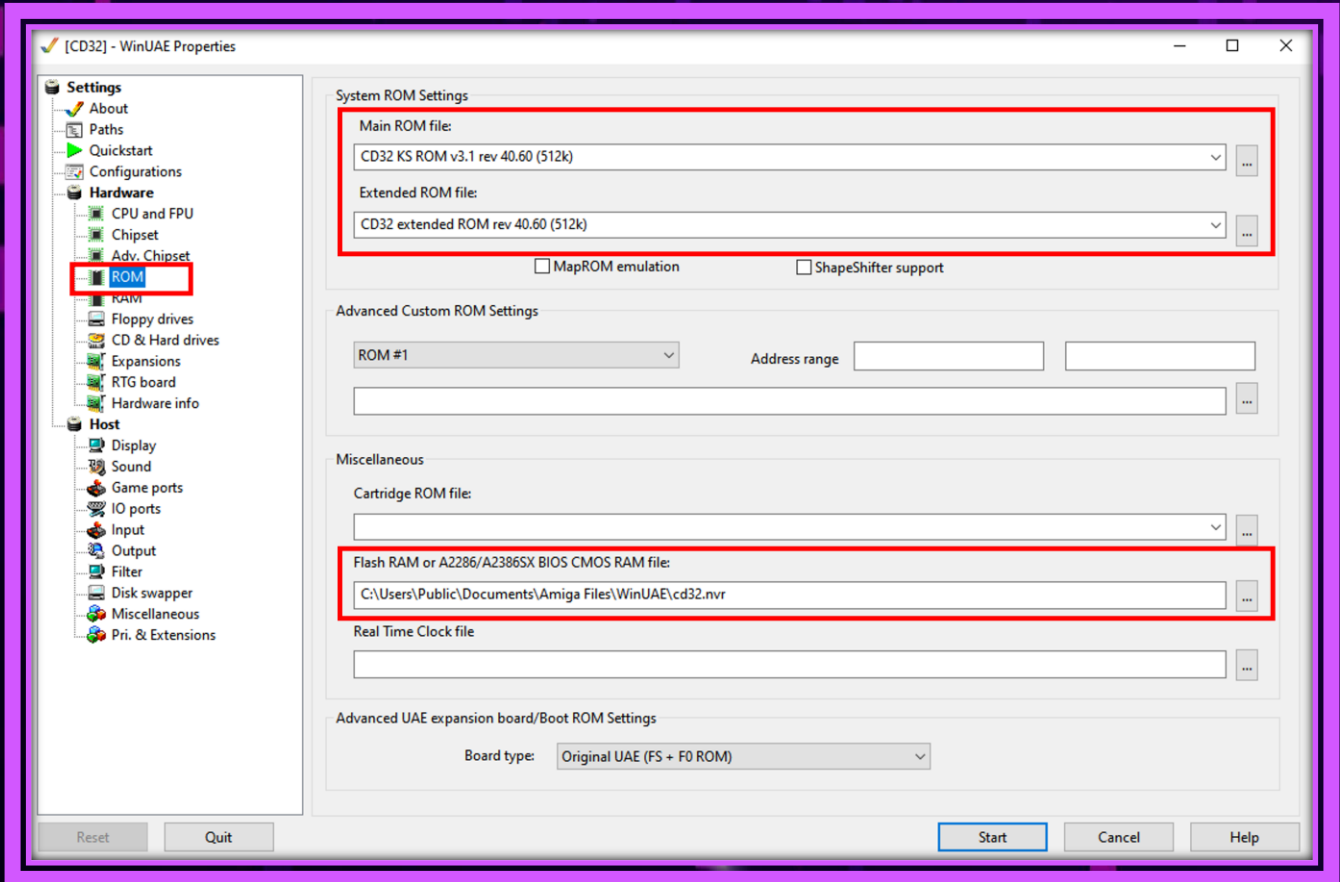

Picture 1

Main ROM file : Select the Rom Kickstart for each model

Extended ROM file : Select the Extended Rom file only for the CDTV or CD32

Flash RAM : Select the Flash Ram File only for the CDTV or CD32

Support

A support section is available for free on
intense-creative.com

The screenshot shows the Intense Creative website. The header features the logo "intense creative" with a stylized arrow pointing left, and the tagline "TAKE POSSESSION OF YOUR AMIGA PASSION". Below the header is a navigation menu with links: Home, Events, Calendar, Latest Images, FAQ, Search, Memberlist, Usergroups, Profile, Messages, and Log out [21stcentury].

Below the navigation menu, there is a section titled "Join us to Intense Amiga for to follow the latest Amiga news". To the left of this section, it says "Current dateTime is Sun 27 Jul 2025 - 15:46". To the right, it says "Your last visit was on Sun 27 Jul 2025 - 9:18".

In the center, there is a promotional box titled "GET THE AMIGA SENSATION" with three buttons: "magicuae", "STICKERS RENEW", and "DELUXE ICONS". Below these buttons, it says "Choose your product to download" and "Share".

Below the promotional box, there is a table with the following data:

	TOPICS	POSTS	LAST POSTS
MEMBER EXCLUSIVES			
★ Product Previews Download our products before their availability.	2	2	Welcome to the M... Thu 15 May 2025 - 16:38 21stcentury
DELUXE ICONS			
★ Deluxe Icons Bring elegance to your desktop	3	6	Deluxe Icons Vol... Wed 12 Feb 2025 - 21:23 21stcentury

intense
creative



intense-creative.com

